


COR Pure Free 1300

BL COR Pure Free LED strip 1285lm/m 24VDC 9.6W/m IP20 927 5m

Article no.: 171854

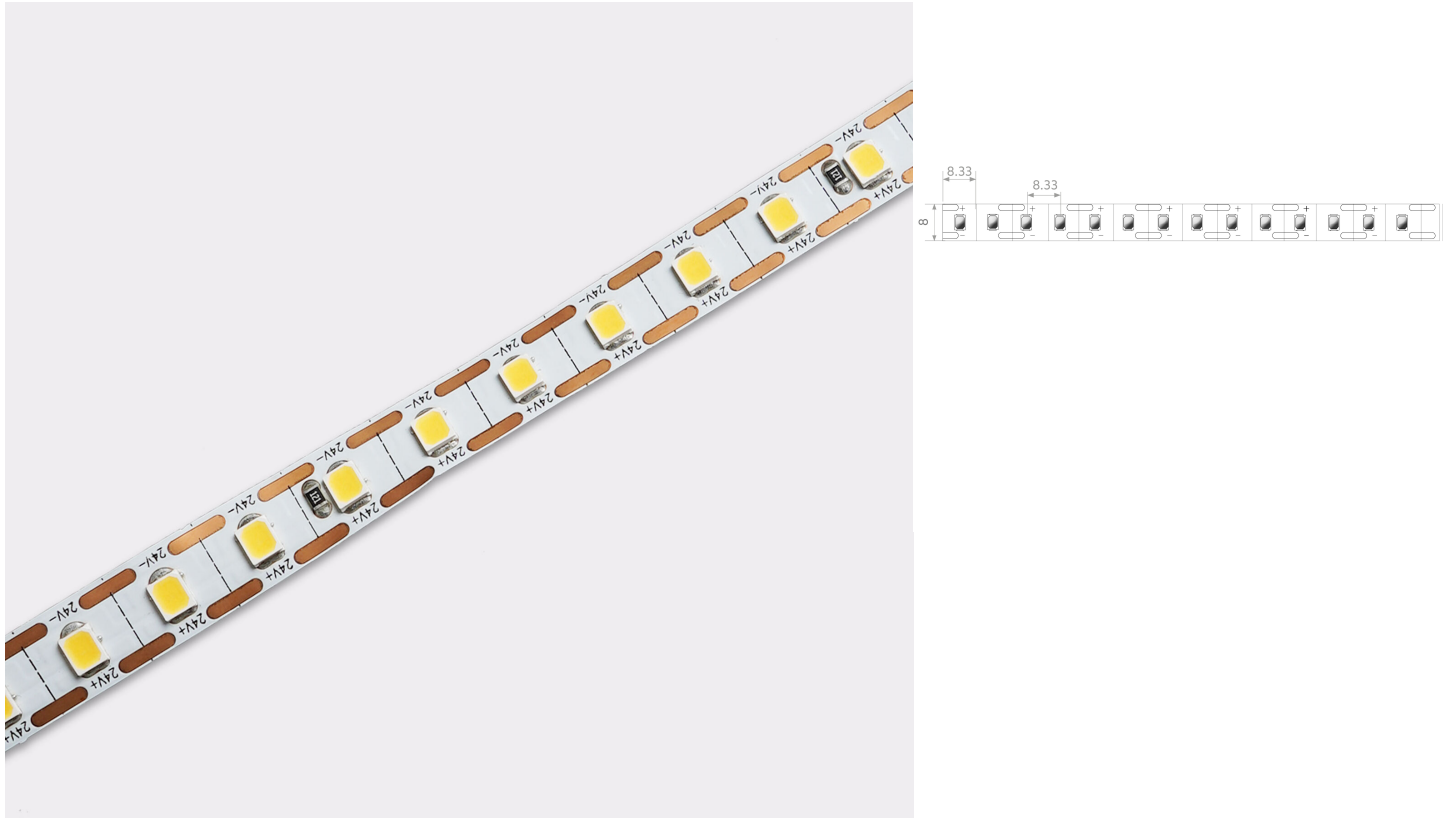

Distance



Distance relating to



Length of particular segments

TENDER TEXT

LED strip light Freecut 1285 lm/m 24VDC 9.6W/m 134lm/W IP20 CRI>90 2700K, Separability 8.33 mm, one-sided connection cable 50 cm, WHITE Colors and BLT label 5 meters LED module COR Pure Free 1300 Article 171854 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Suitable for ambient temperatures from -25 ... +40 at a service life of 60000 . The COR Pure Free 1300 LED-strip has a luminous flux of 1285 at 9.6 , resulting in an efficiency of 134 . At a nominal voltage of 24 DC on the connection, a maximum module length of 5000 can be achieved. In terms of lighting, the module has a colour temperature of 2700 and a beam angle of 119 . All this with a colour rendering index of >90 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 8.33 , resulting in a LED distance of 8.33 . Degree of protection IP20 Dimension (L x W x H): 5000 x 8 x 1.5

TOP-FEATURES

- //__ LED strip, all 8.33 separable
- //__ Without soldering connection
- //__ 24 -Single LED per cut for more flexible application



COR Pure Free 1300

BL COR Pure Free LED strip 1285lm/m 24VDC 9.6W/m IP20 927 5m

Article no.: 171854



PACKAGING INFORMATION

State of origin	CN
Customs tariff number	9405423990
Net weight [g]	135
Gross weight [g]	135
Net width [mm]	8
Net height [mm]	1.5
Net length [mm]	5000

* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of $\pm 10\%$ (or $\pm 15\%$ at ECO / TWO / RGB / AIR). Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at