

BLAIR TOP RGB

BLAIRT0380024DC14467RGB000C05

Article no.: 101384

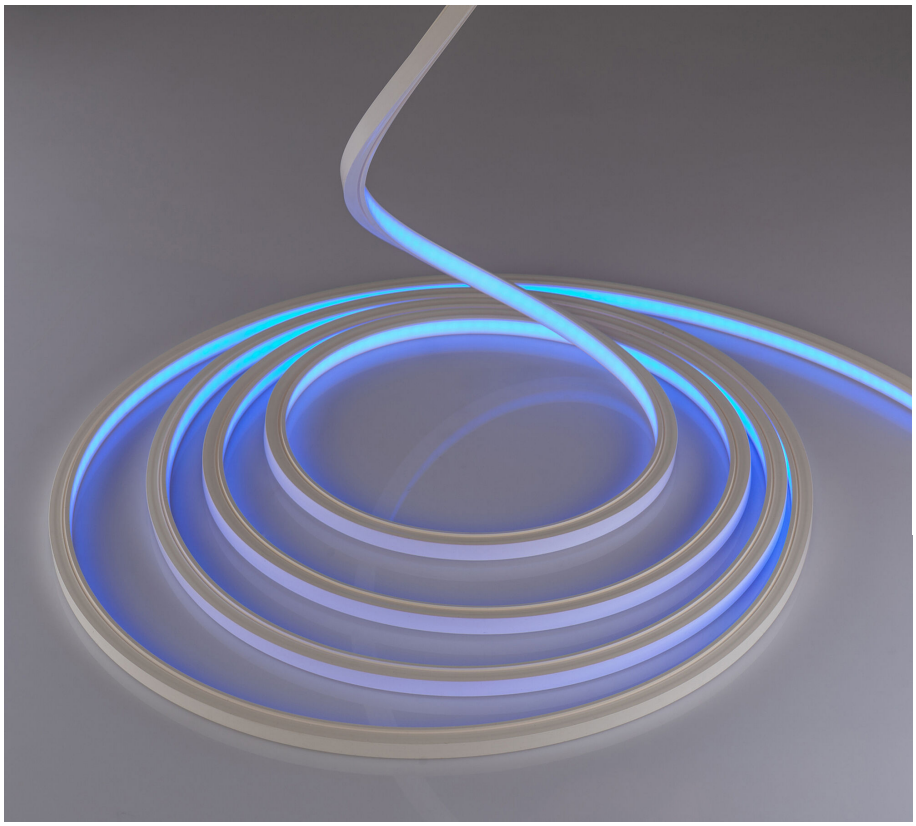

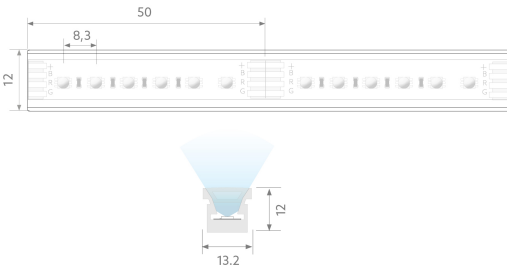

IP67
Degree of protection (IP)

50
Length of particular segments

RGB
Colour temperature

380
Luminous flux per meter

TENDER TEXT

BILTONAIR TOP 380 LED strip 24VDC 14,4W/m IP67 RGB COLOR 5m LED module BLAIR TOP RGB Article 101384 Linear LED light strip on a flexible circuit board. Installation using appropriate mounting accessories in conjunction with Plug-&-Play connection system. Dimmable using BILTON LED dimmer. Suitable for ambient temperatures from -20 ... +45 at a service life of 36000 . The BLAIR TOP RGB LED-strip has a luminous flux of 380 at 14.4 , resulting in an efficiency of 36 . At a nominal voltage of 24 DC on the connection, a maximum module length of 5000 can be achieved. In terms of lighting, the module has a colour temperature of RGB and a beam angle of 120 . All this with a colour rendering index of ohne and a Binning selection based on (MacAdams). The light strip can be separated every 50 , resulting in a LED distance of 8.3 . Degree of protection IP67 Dimension (L x W x H): 5020 x 13.2 x 12

TOP-FEATURES

//__ IP67 protection in highly flexible silicone jacket

//__ Unlimited design flexibility in shape and color

//__ Effective light scenarios with a strong colour spectrum

//__ Wave-shaped bendable in direction of the light-emitting surface

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261119 | Errors and printing errors are reserved.

BLAIR TOP RGB

BLAIRT0380024DC14467RGB000C05
Article no.: 101384

PACKAGING INFORMATION

State of origin	AT
Customs tariff number	94054039
Gross width [mm]	330
Gross height [mm]	27
Gross length [mm]	330
Net width [mm]	13.2
Net height [mm]	12
Net length [mm]	5020

* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

NECESSARY ACCESSORIES

Article	Article no.
Profile AIR TOP	170885
Safety clip AIR TOP	170919

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261119 | Errors and printing errors are reserved.