


BLPSI 35

BLPSI230AC040024DC0160067X

Article no.: 170158

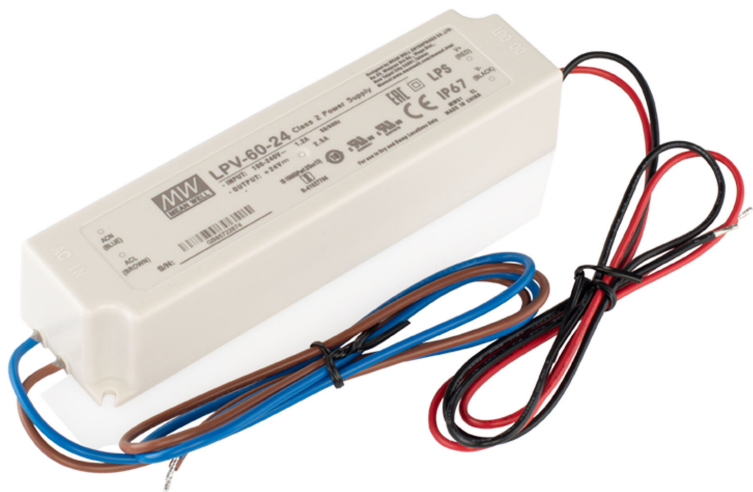

Output voltage range



Output power range



Degree of protection (IP)

TENDER TEXT

BILTON BLPSI 35 Article 170158 The power supply can be used up to 40 output power and 24 output voltage. The supply voltage of the power supply is and has a IP67 protection class and protection class III . Dimension (L x W x H): 171 x 61.5 x 36.8



BLPSI 35

BLPSI230AC040024DC0160067X

Article no.: 170158



MECHANICAL DATA

Housing	Metallgehäuse
Width	61.5
Length	171
Height	36.8
Model	Static
Control signal	ohne
Suitable for outdoor use	yes
Degree of protection (IP)	IP67

ELECTRICAL DATA

Protection class	III
Control signal	ohne
Output voltage range	24
Output power range	40
Output current range	1,67
Type of dimming	not dimmable
Suitable for constant current	yes
Suitable for constant voltage	yes
Suitable for DC-voltage (primary side)	yes

PACKAGING INFORMATION

State of origin	CN
Net weight [g]	730
Gross weight [g]	730
Net width [mm]	61.5
Net height [mm]	36.8
Net length [mm]	171

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at