
BLTWS 2000 >80

BLTWS2000024DC18420827865W05
Article no.: 101906

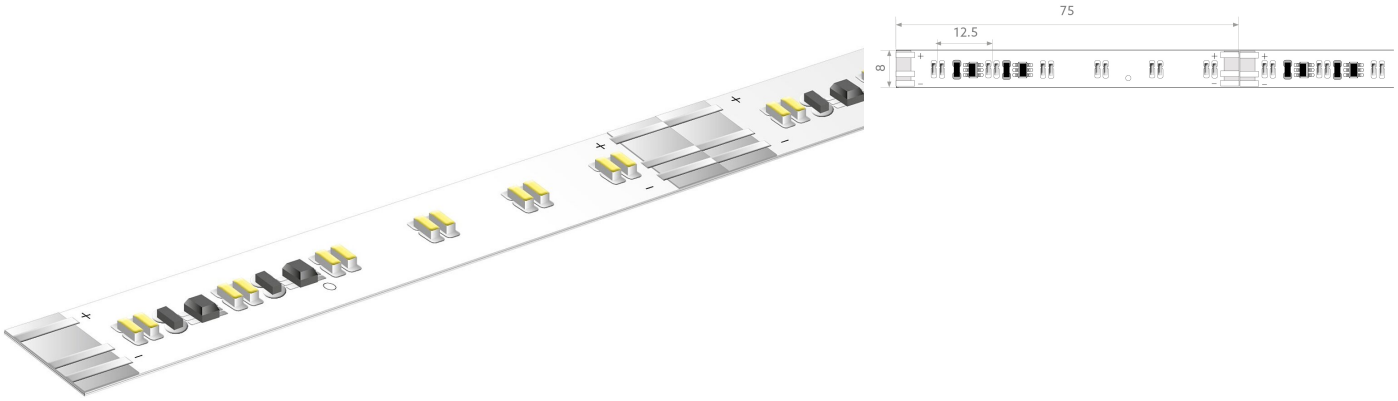

24
Lamp voltage

8500
Max. length

75
Length of particular segments

700 - 650
Colour temperature

TENDER TEXT

BILTONTW 2000 LED strip 24VDC 18,4W/m IP20 CRI>80 2700-6500K WHITE 5m LED module BLTWS 2000 >80 Article 101906 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Dimmable using BILTON LED dimmer. Suitable for ambient temperatures from -20 ... +45 at a service life of 60000 . The BLTWS 2000 >80 LED-strip has a luminous flux of 2000 at 18.4 , resulting in an efficiency of 109 . At a nominal voltage of 24 DC on the connection, a maximum module length of 8500 can be achieved. In terms of lighting, the module has a colour temperature of 2700 - 6500 and a beam angle of 120 . All this with a colour rendering index of >80 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 75 , resulting in a LED distance of 12.5 . Degree of protection IP20 Dimension (L x W x H): 5025 x 8 x 1.5

TOP-FEATURES

//__ BILTON TW is the name for Tuneable White

//__ With this series becomes a physiologically valuable light (= Human Centric Lighting) generated

//__ Long cable len gths and better stability through double layers

//__ Cont inuously dimming between 2700 - 6500

24 >80 IP20 2700 - 6500 RoHS COMPLIANT 2002/95/EC

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261119 | Errors and printing errors are reserved.

BLTWS 2000 >80

BLTWS2000024DC18420827865W05
Article no.: 101906

BETTER LIGHT

PACKAGING INFORMATION

State of origin	AT
Customs tariff number	94054099
Gross width [mm]	200
Gross height [mm]	18
Gross length [mm]	200
Net width [mm]	8
Net height [mm]	1.5
Net length [mm]	5025

* Specifications of the electrical and photometric parameters: All values are valid in the thermally steady state at 25 ° C ambient temperature under the standardized measuring environment of BILTON. Nominal lumen values differ for different light colors, these values can be found in the respective data sheets. All values can have tolerances of +/- 15 %.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261119 | Errors and printing errors are reserved.