
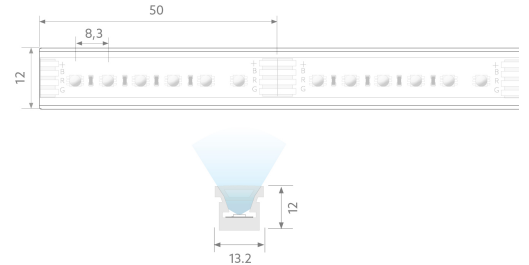


BL AIR TOP RGB

BL AIR Top LED lighth tube 380lm/m 24VDC 14.4W/m IP67 RGB 5m

Article no.: 102144

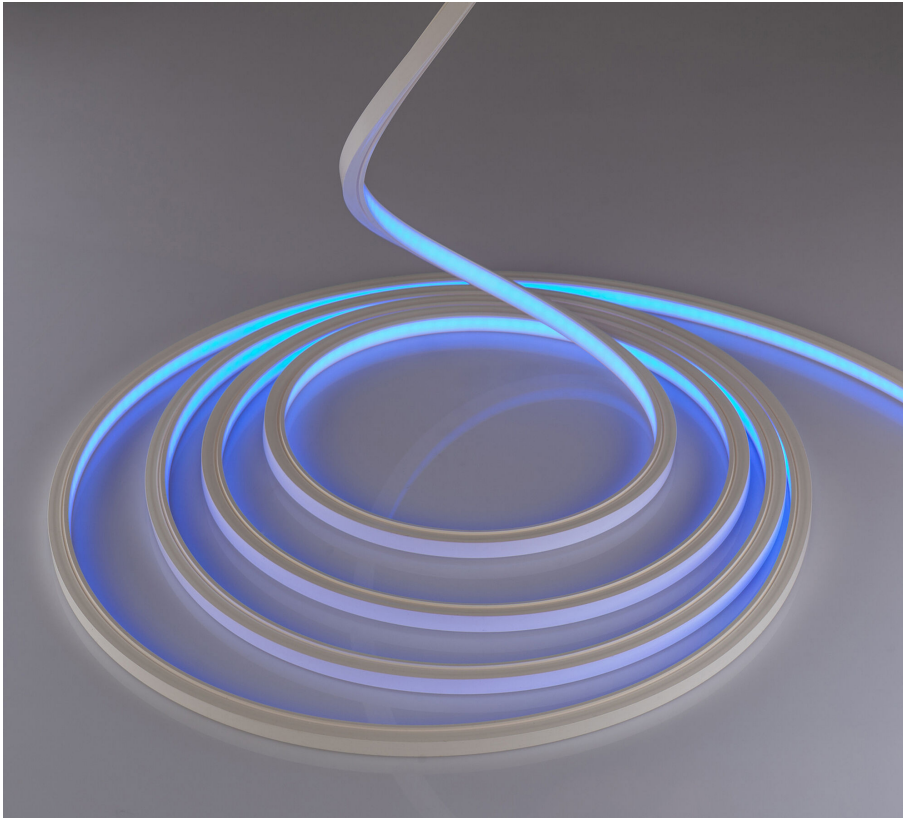

Lamp voltage



Max. length



Colour rendering index CRI



Luminous flux per meter

TENDER TEXT

AIR TOP LED lighth tube, LED strip in silicone sheath, 380 lm/m, wave-shaped bend to the light emission surface, cable connection on one side, cable outlet straight, 24VDC 14.4W/m IP67 RGB COLOR 5m LED module BL AIR TOP RGB Article 102144 The BL AIR TOP RGB LED light tube has a luminous flux of 380 at a power of 14.4 , which results in an efficiency of 26 . With a nominal voltage of 24 DC at the connection, a maximum module length of 5020 can be achieved. In terms of lighting, the module has a color temperature of RGB and a beam angle of 120 . All with a color rendering index of ohne and a binning selection according to (MacAdams). The light strip can be divided every 50 , resulting in an LED spacing of 8.3 . Protection class IP67 , Smallest possible bending radius 200 . At an ambient temperature of 85°C, a service life of 50,000 hours can still be guaranteed. Up to 95°C, the service life is 30,000 hours and at temperatures of 100°C it is still 16,000 hours (L70B50). Dimensions (L x W x H): 5020 x 13.2 x 12

TOP-FEATURES

- //__ Homogeneously luminous light line without visible light points
- //__ IP67 -protection in highly flexible silicone jacket
- //__ New connection: the end caps close straight to the profile



BL AIR TOP RGB

BL AIR Top LED light tube 380lm/m 24VDC 14.4W/m IP67 RGB 5m

Article no.: 102144



MECHANICAL DATA

Width	13.2
Length	5020
Height/depth	12
Height	12
Colour	White
Model	Schlauch
Self-adhesive	nein
Lamp type	LED nicht austauschbar
Distance	8.3
Distance relating to	LED zu LED
Degree of protection (IP)	IP67
Length of particular segments	50
Lowest bending radius	200
Number of lamps per meter	120

ELECTRICAL DATA

Protection class	III
Voltage type	DC
Lamp voltage	24
Input voltage range	23 - 25
Lamp power per meter	14.4
Overall efficiency	26

LIGHT TECHNICAL DATA

Beam angle	120
Colour rendering index CRI	ohne
Colour temperature [K]	RGB
Colour of light	RGB
Luminous flux per meter	380

CONNECTION

Conductor cross section	0.5
Number of poles	2
Max. length	5020

TEMPERATURE TECHNICAL DATA

Ambient/storage temperature	- 20 ... + 55
Ambient temperature during operating	- 20 ... + 55
Rated life time L80/B10 at 25 °C	50000

PACKAGING INFORMATION

State of origin	AT
BL AIR Top LED light tube 380lm/m 24VDC 14.4W/m IP67 RGB 5m	
Customs tariff number	94054039
Article no.: 102144	
Net weight [g]	609
Gross weight [g]	609
Gross width [mm]	330
Gross height [mm]	27
Gross length [mm]	330
Net width [mm]	13.2
Net height [mm]	12
Net length [mm]	5020



* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

NECESSARY ACCESSORIES

Article	Article no.
Mounting clip for AIR TOP	171149
Safety clip for AIR TOP	170918
Surface mounted profile PC for AIR TOP	170885
End cap set for AIR TOP	171555

Surface mounted profile Alu for
BL AIR TOP RGB

171031

BL AIR Top LED light tube 380lm/m 24VDC 14.4W/m IP67 RGB 5m

Article no.: 102144



SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at