




BL AIR TOP 600 EOL

BL AIR Top LED lighth tube 600lm/m 24VDC 7.5W/m IP67 827 1m
Article no.: 102129



Lamp voltage

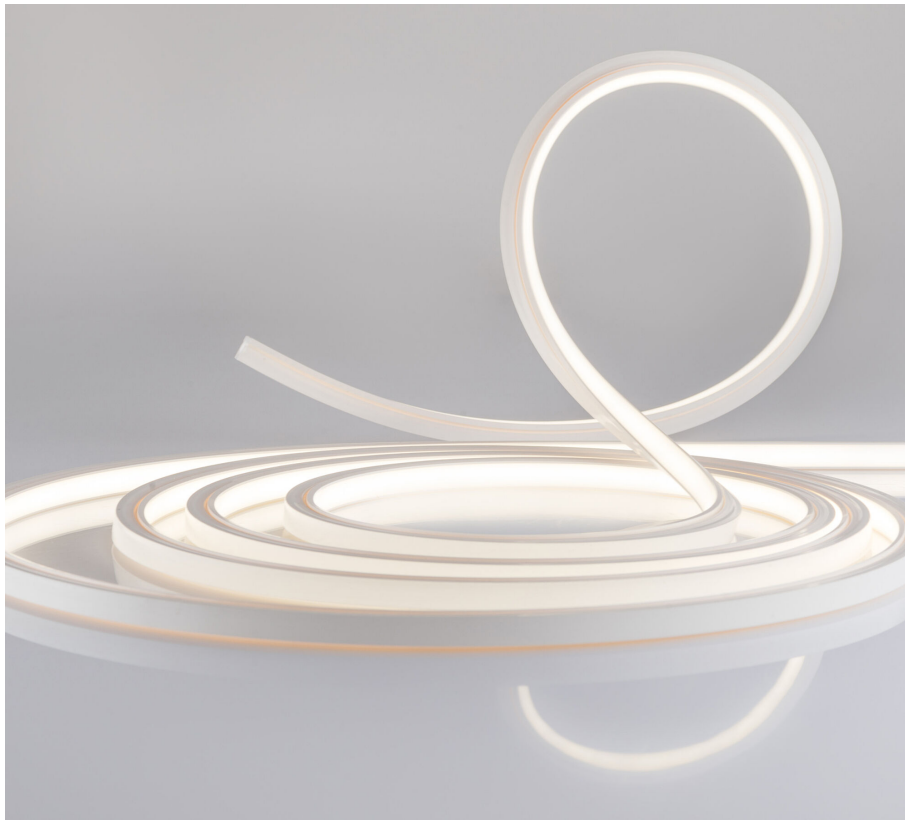

Max. length



Colour rendering index CRI



Luminous flux per meter

TENDER TEXT

AIR TOP LED lighth tube, LED strip in silicone sheath, 600 lm/m, wave-shaped bend to light emission surface, cable connection on one side, cable outlet at bottom, OSP Flex, 24VDC 7.5W/m IP67 CRI>80 2700K WHITE 1.01m LED module BL AIR TOP 600 EOL Article 102129 Linear LED light strip on a flexible circuit board. Installation using appropriate mounting accessories in conjunction with Plug-&-Play connection system. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +55 at a service life of 50000 . At an ambient temperature of 85°C, a lifetime of 50,000 hours can still be guaranteed. Up to 95°C the lifetime is 30,000 hours and at temperatures of 100°C still 16,000 hours (> L70B50). The BL AIR TOP 600 EOL LED-strip has a luminous flux of 600 at 7.5 , resulting in an efficiency of 80 . At a nominal voltage of 24 DC on the connection, a maximum module length of 5010 can be achieved. In terms of lighting, the module has a colour temperature of 2700 K and a beam angle of 120 . All this with a colour rendering index of >80 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50 , resulting in a LED distance of 7.14 . Degree of protection IP67 Smallest possible bending radius 200 Dimension (L x W x H): 1010 x 13.2 x 12

TOP-FEATURES

- //__ Homogeneously luminous light line without visible light points
- //__ IP67 -protection in highly flexible silicone jacket
- //__
- UL certified
- //__ New connection: the end caps close straight to the profile

BL AIR TOP 600 EOL

BL AIR Top LED light tube 600lm/m 24VDC 7.5W/m IP67 827 1m

Article no.: 102129



MECHANICAL DATA

| | |
|-------------------------------|------------------------|
| Width | 13.2 |
| Length | 1010 |
| Height/depth | 12 |
| Height | 12 |
| Colour | White |
| Model | Schlauch |
| Self-adhesive | nein |
| Lamp type | LED nicht austauschbar |
| Distance | 7.14 |
| Distance relating to | LED zu LED |
| Degree of protection (IP) | IP67 |
| Length of particular segments | 50 |
| Lowest bending radius | 200 |
| Number of lamps per meter | 140 |

ELECTRICAL DATA

| | |
|----------------------|---------|
| Protection class | III |
| Voltage type | DC |
| Lamp voltage | 24 |
| Input voltage range | 23 - 25 |
| Lamp power per meter | 7.5 |
| Overall efficiency | 80 |

LIGHT TECHNICAL DATA

| | |
|-------------------------------------|-------|
| Beam angle | 120 |
| Colour rendering index CRI | >80 |
| Colour temperature [K] | 2700 |
| Colour of light | White |
| Luminous flux per meter | 600 |
| Colour consistency (McAdam ellipse) | SDCM3 |

CONNECTION

| | |
|-------------------------|------|
| Conductor cross section | 0.5 |
| Number of poles | 2 |
| Max. length | 5010 |

TEMPERATURE TECHNICAL DATA

Ambient/storage temperature - 20 ... + 55
BL AIR Top LED light tube 600lm/m 24VDC 7.5W/m IP67 827 1m
Ambient temperature during operating - 20 ... + 55
Article no.: 102129
Rated life time L80/B10 at 25 °C 50000



PACKAGING INFORMATION

| | |
|-----------------------|----------|
| State of origin | AT |
| Customs tariff number | 94054039 |
| Net weight [g] | 0.125 |
| Gross weight [g] | 0.125 |
| Gross width [mm] | 330 |
| Gross height [mm] | 27 |
| Gross length [mm] | 330 |
| Net width [mm] | 13.2 |
| Net height [mm] | 12 |
| Net length [mm] | 1010 |

* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at