

BL COR Skyline

BL COR Skyline LED light system 1320lm/m 24VDC 13.5W/m IP20 940 6m black
Article no.: 171595

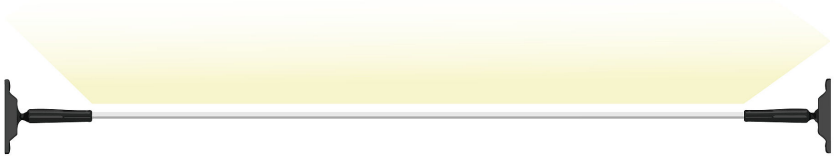

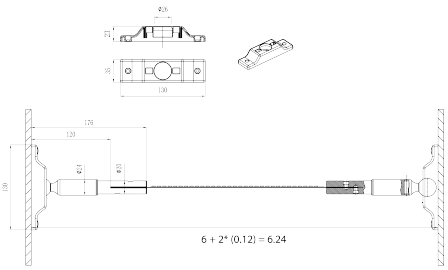

6000
Length

black
Colour housing

austausch
Lamp type

rect / indire
Light exit

TENDER TEXT

Skyline black LED lighting system with LED strip 1320 lm/m and mounting material 24VDC 13.5W/m 98lm/W IP20 CRI>90 4000K WHITE, Colors and BLT label 6 metres LED Module BL COR Skyline Item 171595 Linear LED strip light on steel tape with movable mounting modules and cable for easy assembly and quick installation. The BL COR Skyline LED strip light has a luminous flux of 1320 with a power of 13.5 , giving an efficiency of 98 . With a nominal voltage of 24 DC at the connection. In terms of lighting, the module has a color temperature of 4000 and a beam angle of 120 . All with a color rendering index of >90 . The light strip can be divided every 50 , resulting in an LED spacing of 8.33 . Protection class IP20 . Dimensions (L x W x H): 6000 x 35 x 130

TOP-FEATURES

//__ The flexible rotation axis offers a wide range of angles

//__ Innovative aluminum strip solution with integrated LED strip

//__ Simple configuration - cut to length, plug in - done

//__ Replaceable LED strips up to 13.5 Watt

>90 IP20 4000

PACKAGING INFORMATION

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261119 | Errors and printing errors are reserved.

BL COR Skyline

BL COR Skyline LED light system 1320lm/m 24VDC 13.5W/m IP20 940 6m black
Article no.: 171595

State of origin	CN
Customs tariff number	94059900
Net weight [g]	2000
Gross weight [g]	2000
Gross width [mm]	352
Gross height [mm]	70
Gross length [mm]	346
Net width [mm]	35
Net height [mm]	130
Net length [mm]	60000

* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 10% (or -/+ 15 %at ECO / TWO / RGB / AIR). Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

NECESSARY ACCESSORIES

Article	Article no.
	171864

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261119 | Errors and printing errors are reserved.