

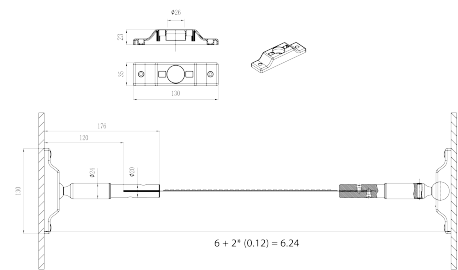


# BL COR Skyline

BL COR Skyline LED light system 1320lm/m 24VDC 13.5W/m IP20 940 6m black  
Article no.: 171595

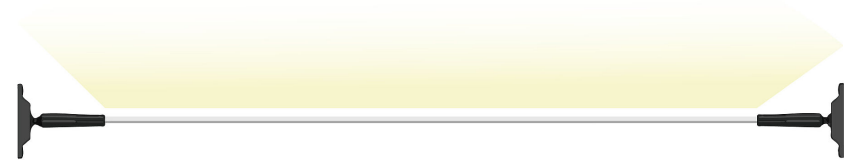

Length



Colour housing



Lamp type



Light exit

## TENDER TEXT

Skyline black LED lighting system with LED strip 1320 lm/m and mounting material 24VDC 13.5W/m 98lm/W IP20 CRI>90 4000K WHITE, Colors and BLT label 6 metres LED Module BL COR Skyline Item 171595 Linear LED strip light on steel tape with movable mounting modules and cable for easy assembly and quick installation. The BL COR Skyline LED strip light has a luminous flux of 1320 with a power of 13.5 , giving an efficiency of 98 . With a nominal voltage of 24 DC at the connection. In terms of lighting, the module has a color temperature of 4000 and a beam angle of 120 . All with a color rendering index of >90 . The light strip can be divided every 50 , resulting in an LED spacing of 8.33 . Protection class IP20 . Dimensions (L x W x H): 6000 x 35 x 130

## TOP-FEATURES

- //\_\_ The flexible rotation axis offers a wide range of angles
- //\_\_ Innovative aluminum strip solution with integrated LED strip
- //\_\_ Simple configuration - cut to length, plug in - done
- //\_\_ Replaceable LED strips up to 13.5 Watt



# BL COR Skyline

**BL COR Skyline LED light system 1320lm/m 24VDC 13.5W/m IP20 940 6m black**

Article no.: 171595



## MECHANICAL DATA

Colour housing	Black
Width	35
Length	6000
Height/depth	130
With movement sensor	nein
With switch	nein
Lamp type	LED austauschbar
Distance	8.33
Distance relating to	LED zu LED
Degree of protection (IP)	IP20
With lamp	yes
Length of particular segments	50
Control gear included	nein
Suspension included in delivery	yes
Light distributor	ohne

## ELECTRICAL DATA

Protection class	III
Voltage type	DC
Nominal voltage	24
Overall efficiency	98
Max. system power	13.5

## LIGHT TECHNICAL DATA


Beam angle	120
Colour rendering index CRI	>90
Light exit	direct / indirect
Light distribution	symmetrical
Rated luminous flux according to IEC 62722-2-1	1320
Colour temperature	4000
Colour of light	White

## CONNECTION

Electrical connection with connector system	yes
---	-----

## PACKAGING INFORMATION

State of origin	CN
Customs tariff number	94059900
Net weight [g]	2000

Gross weight [g]	2000	 <b>BETTER LIGHT</b>
Gross width [mm]	352	
Gross height [mm]	70	
<b>BL COR Skyline LED light system 1320lm/m 24VDC 13.5W/m IP20 940 6m black</b>		
Gross length [mm]	346	
Article no.: 171595		
Net width [mm]	35	
Net height [mm]	130	
Net length [mm]	60000	

\* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 10% (or -/+ 15 %at ECO / TWO / RGB / AIR ). Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

## NECESSARY ACCESSORIES

Article	Article no.
	<b>171864</b>

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)