


Ceiling & wall luminaires Comfort

BL CWL Comfort R500mm 4000lm 38W 110D/I 840 WT


Article no.: 730061

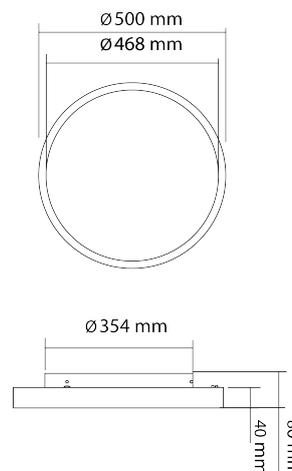

Beam angle



Suitable for emergency lighting



Height



Rated luminous flux according to IEC 62722-2-1

TENDER TEXT

LED wall-mounted ceiling light round diameter 500mm, IP20, protection class I, direct beam angle 110°, additional indirect beam, CRI >80, 4,000 Kelvin, UGR Ceiling & wall luminaires Comfort Article 730061 LED ceiling and wall light with direct/indirect light distribution for a pleasant and homogeneous room experience. Installation option: Bajonettverschluss Light body made of high-quality Aluminium, which is coated with a White White. The cover is made of Plastic Opal. Lumen 4000 with an efficiency of 105 and a color rendering of >80, total power 38, beam angle 110, service life 50000, protection class IP20, UGR

TOP-FEATURES

- //__ Color temperature of 4000
- //__ In- and direct light component with asymmetrical illumination
- //__ Easy mounting due to Bajonettverschluss
- //__ Housing made of Aluminium White



Ceiling & wall luminaires Comfort

BL CWL Comfort R500mm 4000lm 38W 110D/I 840 WT

Article no.: 730061



PACKAGING INFORMATION

State of origin	CN
Customs tariff number	94051098
Gross width [mm]	560
Gross height [mm]	125
Gross length [mm]	560
Net width [mm]	500
Net height [mm]	80
Net length [mm]	500

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at