


BL Drive DIM DALI

BL Dimmer SXT 230VAC 100W for LED strip IP20 DALI
Article no.: 101647

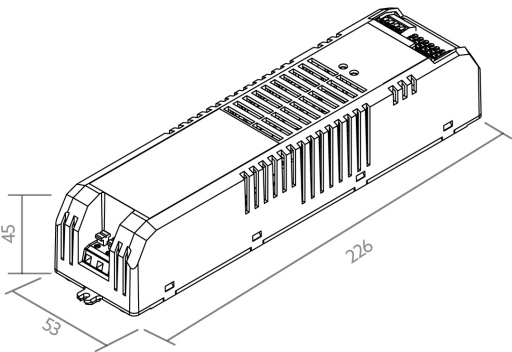

220 - 240

Input voltage range

100

Output power range

DALI

Control signal

4000

Output current range

TENDER TEXT

1-4 channel LED dimmer for constant voltage 24VDC. Maximum total output 100W at 24VDC (max. 4A). Input voltage 230VAC/50Hz. DALI control signal. PWM frequency 600Hz. Protection class IP20. Protection class III. dimensions LxWxH = 226x53x45mm LED dimmer BILTON LEDON Technology BL Drive DIM DALI DALI Article 101647 The BL Drive DIM DALI series is a 1- to 4 channel LED dimmer for modules in constant current operation. The total load of max. 4000 can be freely distributed to these 4 channels. The controller is operated with DALI and 220 - 240 and has an output voltage of 24 DC. The power dissipation in stand-by is 0.5 . The dimming frequency of the PWM signal is 600 . Protection degree IP20 and protection class III . Dimension (L x W x H): 226 x 53 x 45



BL Drive DIM DALI

BL Dimmer SXT 230VAC 100W for LED strip IP20 DALI

Article no.: 101647



MECHANICAL DATA

| | |
|-----------------------------|-------------------|
| Housing | Kunststoffgehäuse |
| Width | 53 |
| Length | 226 |
| Height | 45 |
| Model | dynamisch |
| Control signal | DALI |
| With overheating protection | yes |
| Suitable for outdoor use | nein |
| Degree of protection (IP) | IP20 |
| Core cross section | 0,75 - 1,5 |

ELECTRICAL DATA

| | |
|--|-----------|
| Protection class | III |
| Dimming frequency | 600 |
| Voltage type | AC |
| Number of channels | 4 |
| Control signal | DALI |
| With overheating protection | yes |
| Input voltage range | 220 - 240 |
| Output voltage range | 24 |
| Output power range | 100 |
| Output current range | 4000 |
| Type of dimming | DALI |
| Overload protection | yes |
| Standby power consumption (solstandby) | 0.5 |
| Suitable for constant current | nein |
| Suitable for constant voltage | yes |
| Suitable for DC-voltage (primary side) | nein |

CONNECTION

| | |
|--------------------|------------|
| Number of channels | 4 |
| Core cross section | 0,75 - 1,5 |

TEMPERATURE TECHNICAL DATA

| | |
|--------------------------------------|---------------|
| Ambient/storage temperature | - 20 ... + 50 |
| Operation temperature at Tc | 0 ... + 50 |
| Ambient temperature during operating | - 5 ... + 45 |
| Lifespan at 20 °C | 40000 |

PACKAGING INFORMATION

State of origin SI
BL Dimmer SXT 230VAC 100W for LED strip IP20 DALI
Customs tariff number 85423190
Article no.: 101647
Net weight [g] 352



BETTER LIGHT

| | |
|-------------------|-----|
| Gross weight [g] | 395 |
| Gross width [mm] | 58 |
| Gross height [mm] | 50 |
| Gross length [mm] | 252 |
| Net width [mm] | 53 |
| Net height [mm] | 45 |
| Net length [mm] | 226 |

NECESSARY ACCESSORIES

| Article | Article no. |
|---------------------------|---------------|
| DALI Controller | 170217 |
| DALI USB Interface | 170223 |

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at