


BL Downlight Protected

BL Downlight Protected recessed luminaire 228mm 3300lm 29W 60D 840 WH IP54 800mA

Article no.: 723010

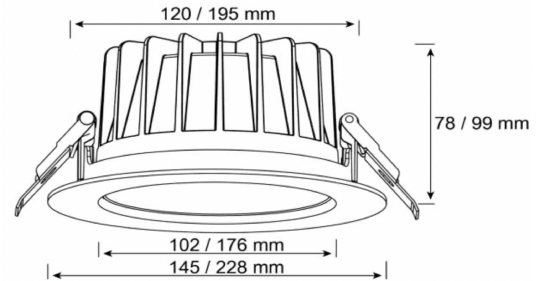

Degree of protection (IP)

TENDER TEXT

Recessed LED downlight, round, 3.300 lumens, 29W, 60° direct beam, CRI >80, 4,000 Kelvin, IP54, protection class III, not dimmable, UGR BL Downlight Protected Article 723010 BL Downlight Protected LED downlight with easy installation and commissioning of the LED power supply unit thanks to the pre-installed connection cable; highly efficient reflector made of Aluminium, high-quality, White cooling housing made of aluminum, excellent thermal management, protection class IP54 on the room side; shock resistance; protection class III, luminaire luminous flux 3300; Connected load 17 W, color rendering >80, light color White, color temperature 4000, beam angle 60, glare-free light distribution using a special reflector, UGR < 22, dimensions (L/W/H): 228 x 228 x 99

TOP-FEATURES

- //__ Excellent glare value of UGR < 22
- //__ Aluminum reflector with mirror optics
- //__ Protection class (room side) IP54
- //__ Plug&Play Connection



BL Downlight Protected

BL Downlight Protected recessed luminaire 228mm 3300lm 29W 60D 840 WH IP54 800mA

Article no.: 723010



PACKAGING INFORMATION

State of origin	CN
Net weight [g]	1135
Gross weight [g]	1305

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at