


BL Downlight Pure MS

BL Downlight Pure-MS 240mm 1900/2300lm 16.5/21W 110D 840 WH IP40 550/700mA

Article no.: 722026

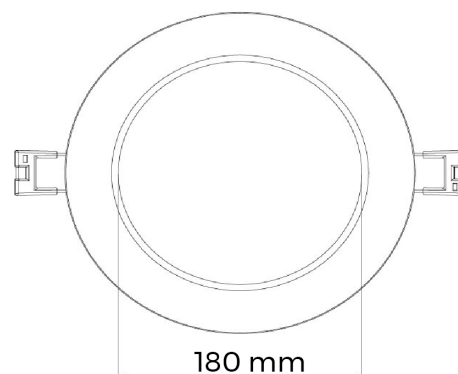

Einbau

Mounting method

IP40

Degree of protection (IP)

TENDER TEXT

LED recessed downlight round, 1,900 or 2,300 lumens, 16.5 or 21W, 110° direct beam, CRI >80, 4,000 Kelvin, IP40, IK05, protection class III, dimmable, white aluminum housing, without power supply, with motion sensor and and through-wiring box, dimensions: D 240mm x H 24mm BL Downlight Pure MS Article 722026 LED Einbau downlight - operating device yes , compact design with high-quality, White coated Aluminium frame; best light quality and homogeneous, symmetrical light distribution across the entire light emission surface; UV-resistant yes , Protection class IP40 , Shock resistance IK05 , Luminous flux , Connected load 21 , Luminaire luminous efficacy , Color rendering >80 , Light color White , Color temperature 4000 , Beam angle 110 , Dimensions: 240 x 240 x 24

TOP-FEATURES

- //__ Plug&Play connection
- //__ With motion sensor
- //__ Compact design with high-quality aluminum



BL Downlight Pure MS

BL Downlight Pure-MS 240mm 1900/2300lm 16.5/21W 110D 840 WH IP40 550/700mA

Article no.: 722026



MECHANICAL DATA

Material housing	Aluminium
Colour housing	White
Width	240
Length	240
Height/depth	24
Installation diameter	227
Outer diameter	240
Mounting method	Einbau
UV-resistant	yes
With movement sensor	yes
With light sensor	nein
Lamp type	LED nicht austauschbar
Type of fastening	Retaining springs
Impact strength	IK05
Degree of protection (IP)	IP40
With lamp	yes
Control gear included	nein

ELECTRICAL DATA

Protection class	III
Voltage type	DC
Nominal voltage	27 - 30
Max. system power	21

LIGHT TECHNICAL DATA


Beam angle	110
Colour rendering index CRI	>80
Light distribution	symmetrical
Colour temperature	4000
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM4

TEMPERATURE TECHNICAL DATA

Impact strength	IK05
-----------------	------

PACKAGING INFORMATION

State of origin	CN
Customs tariff number	94051190
Net weight [g]	520

Gross weight [g]	601	
Net width [mm]	240	
Net height [mm]	74	
BL Downlight Pure-MS 240mm 1900/2300lm 16.5/21W 110D 840 WH IP40 550/700mA		
Article no.: 722026	240	
		BETTER LIGHT

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at