


BL Downlight Pure Mounted R

BL Downlight Pure surface-mounted 225mm 2000lm 18.5W 110D 840 white IP44 700mA
Article no.: 722032



Mounting method

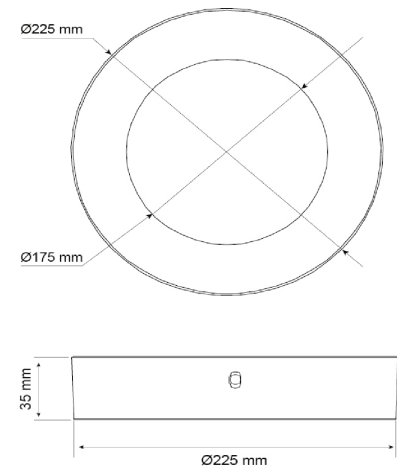

Degree of protection (IP)



Diameter



Flicker-free

TENDER TEXT

LED surface-mounted downlight round, 2,000 lumens, 18.5W, 110° direct beam, CRI >80, 4,000 Kelvin, IP44, IK05, protection class III, dimmable, UV-resistant, EEK F, white aluminium housing, without power supply unit, dimensions: D 225mm x H 35mm BL Downlight Pure Mounted R Article 722032 LED Aufbau downlight with power supply Yes ; including fastening material; compact design with high-quality, White coated Aluminium frame; best light quality and homogeneous, Symmetrical light distribution across the entire light emission surface; UV-resistant Yes , Protection class IP44 , Shock resistance IK05 , Luminous flux 2000 , Connected load 21 , Luminaire luminous efficacy 95 , Color rendering >80 , Light color White , Color temperature 4000 , Beam angle 110 , Ambient temperature -20 ... +40 , Dimensions: 225 x 225 x 35

TOP-FEATURES

- //__ Round and square design
- //__ Installation height 35
- //__ Protection class IP44
- //__ Plug&Play Connection



BL Downlight Pure Mounted R

BL Downlight Pure surface-mounted 225mm 2000lm 18.5W 110D 840 white IP44 700mA

Article no.: 722032



PACKAGING INFORMATION

State of origin	CN
Net weight [g]	540
Gross weight [g]	625
Net width [mm]	225
Net height [mm]	35
Net length [mm]	225

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at