
BL Downlight UGR Flat

BL Downlight UGR Flat recessed luminaire 380mm 1700lm 15W 90D 840 white 450 mA

Article no.: 723020



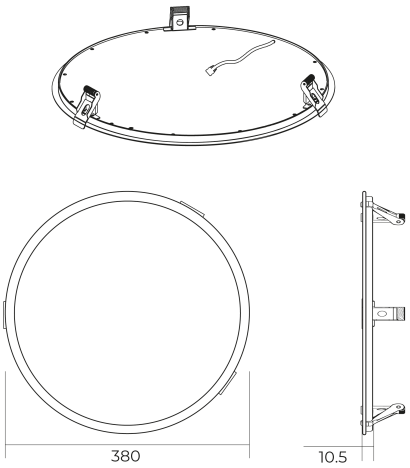

10.5
Height/depth

White
Colour housing

IP20
Degree of protection (IP)

1700
Rated luminous flux according to IEC 62722-2-1

TENDER TEXT

Extra flat round downlight with UGR80, 4000K, D380 x T10.5mm, with 3 spring clamps BL Downlight UGR Flat Article 723020 LED recessed ceiling downlight made of high-quality, White coated Aluminium . The BL Downlight UGR Flat offers high light quality and Symmetrical homogeneous light distribution across the entire light-emitting surface. Designed with protection class IP20 . The luminous flux is 1700 with a connected load of 15 , corresponding to a luminaire efficacy of 113 . The color rendering index (CRI) is Ra >80 . The light color is White with a color temperature of 4000 . The beam angle is 90 . Dimensions: Durchmesser 380 x Höhe 10.5 . Required ceiling cutout 365

TOP-FEATURES

//__ Use where space is limited in the ceiling

//__ Glare limitation <19 despite low height of 10.5

//__ Plug&Play connection

>80 | IP20 | 4000

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261119 | Errors and printing errors are reserved.

BL Downlight UGR Flat

BL Downlight UGR Flat recessed luminaire 380mm 1700lm 15W 90D 840 white 450 mA
Article no.: 723020

PACKAGING INFORMATION

State of origin	CN
Customs tariff number	94054239
Net weight [g]	1180
Gross weight [g]	1370
Gross width [mm]	385
Gross height [mm]	385
Gross length [mm]	45
Net width [mm]	380
Net height [mm]	380
Net length [mm]	10.5

NECESSARY ACCESSORIES

Article	Article no.
LED DRIVER 220-240V CC 450mA 27-45VDC ON/OFF	729160
LED DRIVER 220-240V CC 450mA 9-45VDC DALI	729157

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261119 | Errors and printing errors are reserved.