


ECO Power Supply 60

BL ECO power supply unit CV 220-240VAC 60W 24VDC 2500mA IP20

Article no.: 170162

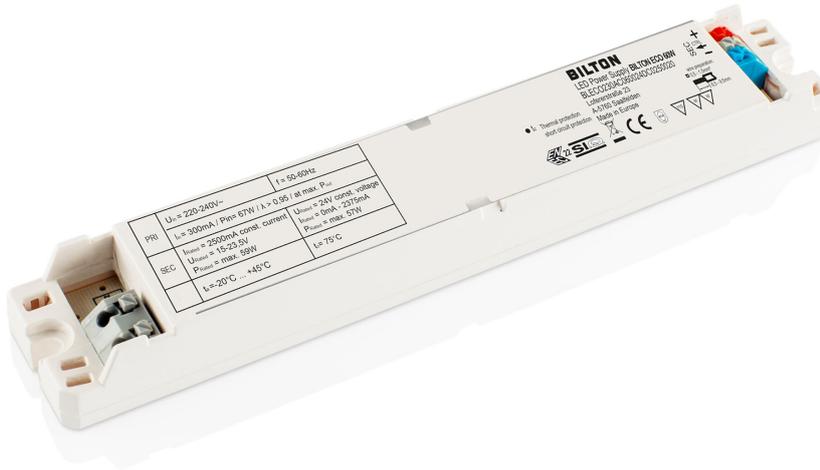

Output voltage range



Output power range



Degree of protection (IP)

TENDER TEXT

Constant voltage power supply unit. Input voltage 220-240VAC. Maximum total power 60W (max. 2.5A). Output voltage 24VDC. Protection class IP20. Protection class II. Dimensions LxWxH = 240x30x21mm BILTON LEDON Technology ECO Power Supply 60 Article 170162 The power supply can be used up to 60 output power and 24 output voltage. The supply voltage of the power supply is 220 - 240 and has a IP20 protection class and protection class II . Dimension (L x W x H): 240 x 30 x 21



ECO Power Supply 60

BL ECO power supply unit CV 220-240VAC 60W 24VDC 2500mA IP20

Article no.: 170162



PACKAGING INFORMATION

State of origin	DE
Customs tariff number	85043180
Net weight [g]	130
Gross weight [g]	154
Gross width [mm]	33
Gross height [mm]	24
Gross length [mm]	243
Net width [mm]	30
Net height [mm]	21
Net length [mm]	240

NECESSARY ACCESSORIES

Article

Article no.

BL Endcap set for BL Dirve Slim

170548

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at

ECO Power Supply 60

BILTON ECO POWER SUPPLY

Article no.: 170162

Possible power supply units per safety automatic machine

ART. NO.	TYPE	PEAK CURRENT	TIME	CHARACTER B				CHARACTER C			
		[A]	[μ s]	6 A	10 A	13 A	16 A	6 A	10 A	13 A	16 A
170160	ECO 40	21	275	8	13	17	21	13	22	29	35
170162	ECO 60	24	275	7	11	15	18	11	19	25	31
170166	ECO 100	34	385	3	5	7	9	5	9	12	15