
# ECO Power Supply 60

**BL ECO power supply unit CV 220-240VAC 60W 24VDC 2500mA IP20**
Article no.: 170162

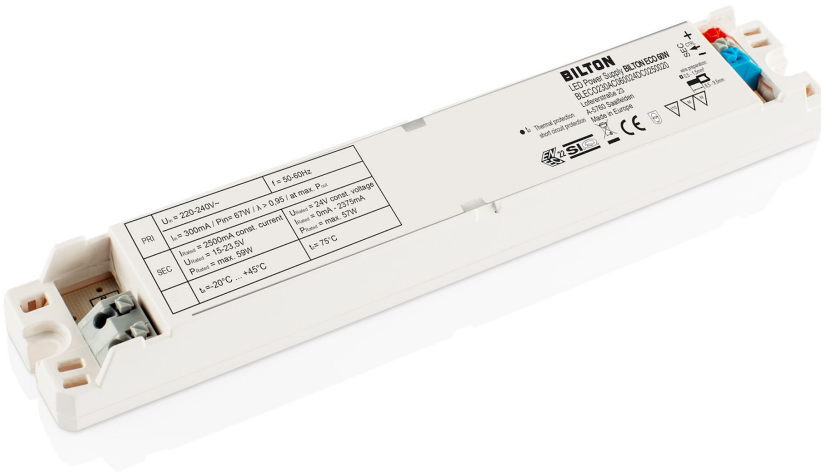


24
Output voltage range

60
Output power range

IP20
Degree of protection (IP)

## TENDER TEXT

Constant voltage power supply unit. Input voltage 220-240VAC. Maximum total power 60W (max. 2.5A). Output voltage 24VDC. Protection class IP20. Protection class II. Dimensions LxWxH = 240x30x21mm BILTON LEDON TechnologyECO Power Supply 60 Article 170162 The power supply can be used up to 60 output power and 24 output voltage. The supply voltage of the power supply is 220 - 240 and has a IP20 protection class and protection class II . Dimension (L x W x H): 240 x 30 x 21

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261119 | Errors and printing errors are reserved.

# ECO Power Supply 60

**BL ECO power supply unit CV 220-240VAC 60W 24VDC 2500mA IP20**
Article no.: 170162

## PACKAGING INFORMATION

| | |
|---|---|
| State of origin | DE |
| Customs tariff number | 85043180 |
| Net weight [g] | 130 |
| Gross weight [g] | 154 |
| Gross width [mm] | 33 |
| Gross height [mm] | 24 |
| Gross length [mm] | 243 |
| Net width [mm] | 30 |
| Net height [mm] | 21 |
| Net length [mm] | 240 |

## NECESSARY ACCESSORIES

| Article | Article no. |
|---|---|
| BL Endcap set for BL Dirve Slim | 170548 |

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at

# BILTON ECO POWER SUPPLY

## Possible power supply units per safety automatic machine

| ART. NO. | TYPE | PEAK CURRENT | TIME | CHARACTER B | | | | CHARACTER C | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | [A] | [µs] | 6 A | 10 A | 13 A | 16 A | 6 A | 10 A | 13 A | 16 A |
| 170160 | ECO 40 | 21 | 275 | 8 | 13 | 17 | 21 | 13 | 22 | 29 | 35 |
| 170162 | ECO 60 | 24 | 275 | 7 | 11 | 15 | 18 | 11 | 19 | 25 | 31 |
| 170166 | ECO 100 | 34 | 385 | 3 | 5 | 7 | 9 | 5 | 9 | 12 | 15 |

Version: 171117 // Errors and printing errors are reserved.
© BILTON LEDON Technology GmbH, Gewerbepark Harham 2, 5760 Saalfelden, Österreich // Tel.: +43 6582 71164 // Mail: office@bltechnology.at// www.bltechnology.at