


BL High Bays Pure

BL HB Pure+ pendant luminaire 258mm 15000lm 100W 120D 840 230V


Article no.: 742088

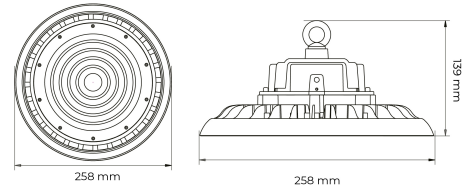


Impact strength



Degree of protection (IP)



Control gear included



Rated luminous flux
according to IEC
62722-2-1

TENDER TEXT

High bay luminaire made of black aluminium, incl. converter and ring bolt, 15000lm, 100W, 4000K, CRI80, 120°, IP65, IK08
Dimensions: D258x139mm BL High Bays Pure Article 742088 LED High Bay with integrated LED power supply - Yes ; Mounting type: Suspension using Seilabhängung , highly efficient lens optics, cooling housing Aluminium black , excellent thermal management, suitable for ambient temperatures of -40...+60 , protection class IP65 , shock resistance IK08 , service life of 50000 , luminous flux 15000 , connected load 100 , color rendering >80 , color temperature 4000 , Beam angle 120 , Shock resistance IK08 , Dimensions (D /H): 258 x 139

PACKAGING INFORMATION

State of origin	CN
Customs tariff number	94054099
Net weight [g]	1800
Gross weight [g]	2400
Gross width [mm]	305
Gross height [mm]	145
Gross length [mm]	305
Net width [mm]	258
Net height [mm]	139
Net length [mm]	258

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at