



Linear Trend pendant luminaire

BL Linear Trend pendant luminaire 1167mm 5000lm 45W 110D/I 840 black DALI

Article no.: 701005

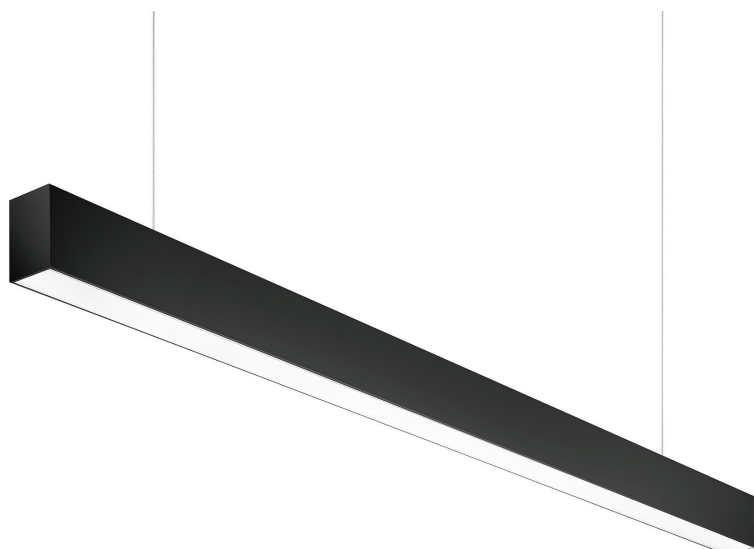

1167

Length



Aluminium

Material



4000

Colour temperature



Yes

Flicker-free

TENDER TEXT

Linear pendant luminaire, black aluminium housing, opal cover, incl. DALI power supply unit and end caps, 5,000 lumens, 45W, direct and indirect light distribution, 45W CRI >80, 4,000 Kelvin, IP20, dimensions: L 1,167 x W 46 x H 61mm Linear Trend pendant luminaire Article 701005 Linear LED luminaire with combined Plastic Opal optics and direct/indirect lighting; High-quality, black coated profile made of Aluminium, without visible screws, ambient temperatures of -20 ... +40 with a service life of 50000, luminous flux 5000, connected load 45, luminous efficacy 111, colour rendering >80, colour consistency SDCM3, UGR

TOP-FEATURES

//__ Best light quality with precise glare control and homogeneous light distribution

//__ Available as surface-mounted or pendant light

//__ Light emission direct/indirect

//__ Optics Plastic Opal



PACKAGING INFORMATION
Linear Trend pendant luminaire

State of origin	CN
BL Linear Trend pendant luminaire 1167mm 5000lm 45W 110D/I 840 black DALI	
Net weight [g]	1830
Article no.: 701005	
Gross weight [g]	2010
Net width [mm]	46
Net height [mm]	61
Net length [mm]	1167



SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at