


Linear Trend pendant luminaire

BL Linear Trend pendant luminaire 1167mm 5000lm 45W 90D/I 840 white DALI

Article no.: 701008

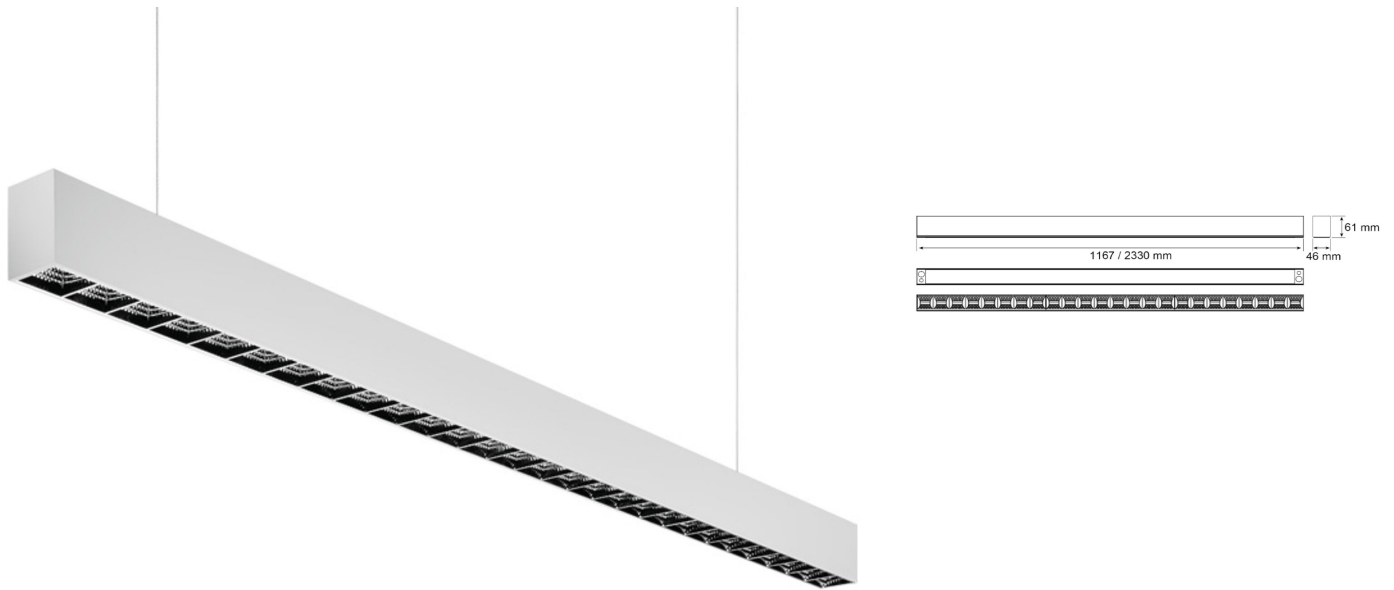

1167

Length

Aluminium

Material

4000

Colour temperature

Yes

Flicker-free

TENDER TEXT

Linear pendant luminaire, white aluminium housing, reflector optics incl. DALI power supply unit and end caps, 5,000 lumens, 45W, direct and indirect light distribution, CRI >80, 4,000 Kelvin, IP20, dimensions: L 1,167 x W 46 x H 61mm Linear Trend pendant luminaire Article 701008 Linear LED luminaire with combined Linsen- Reflektoroptik optics and direct/indirect lighting; High-quality, White coated profile made of Aluminium , without visible screws, ambient temperatures of -20 ... +40 with a service life of , luminous flux 5000 , connected load 45 , luminous efficacy 111 , colour rendering >80 , UGR

TOP-FEATURES

//__ Best light quality with precise glare control and homogeneous light distribution

//__ Available as surface-mounted or pendant light

//__ Light emission direct/indirect

//__ Optics Linsen- Reflektoroptik



PACKAGING INFORMATION
Linear Trend pendant luminaire

State of origin	CN
BL Linear Trend pendant luminaire 1167mm 5000lm 45W 90D/I 840 white DALI	
Net weight [g]	2000
Article no.: 701008	
Gross weight [g]	2170
Net width [mm]	46
Net height [mm]	61
Net length [mm]	1167



SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at