



BL Loop

BL Loop profile luminaire D900mm 3600lm 40W 110D 840 black DALI

Article no.: 704008

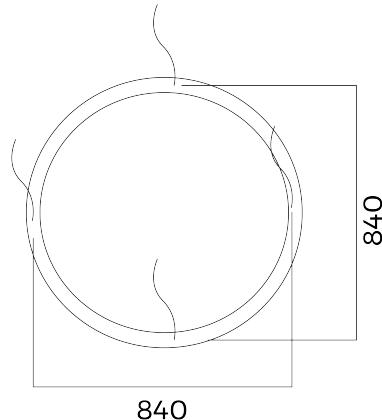


Black

Colour housing



Wire rope

Type of fastening



50000

Rated life time L80/B10 at
25 °C



yes

Dimming DALI

TENDER TEXT

Round LED profile luminaire including suspension, black aluminium housing, 40W, 3,600lm, 4,000K, DALI, CRI>80, 110° direct beam angle, incl. DALI power supply unit, profile size W 60 x H60mm, dimensions: D900 x H60mm Item 704008 LED ring luminaire made of Aluminium Black with power supply - yes , rated voltage AC ; cover made of Plastic opal ; dimmable DALI yes or ON/OFF; protection class IP20 ; flicker-free yes ; easy to install yes ; lifespan of 50000 , Luminous flux 3600 , Colour temperature 4000 , Colour reproduction >80 , Beam angle 110 , Ambient temperature -20 ... +40 diameter 900 x height 60

TOP-FEATURES

- //__ LED ring light suitable for a wide range of applications for general lighting
- //__ Available as switchable on/off or dimmable DALI version
- //__ Easy installation



BL Loop

BL Loop profile luminaire D900mm 3600lm 40W 110D 840 black DALI

Article no.: 704008



MECHANICAL DATA

Material housing	Aluminium
Colour housing	Black
Width [mm]	900
Length	900
Height	60
Diameter	900
Mounting method	Surface / Suspension
Lamp type	LED austauschbar
Type of fastening	Wire rope
Material of the cover	Plastic opal
Degree of protection (IP)	IP20
With lamp	yes
Control gear included	yes
Suspension included in delivery	yes

ELECTRICAL DATA

Protection class	III
Voltage type	AC
Nominal voltage	220 - 240
Operating frequency	50 / 60
Overall efficiency	90
Max. system power	40
Power factor	0.9
Dimming DALI	yes

LIGHT TECHNICAL DATA

Beam angle	110
Colour rendering index CRI	>80
Light exit	direkt
Light distribution	symmetrical
Rated luminous flux according to IEC 62722-2-1	3600
Colour temperature	4000
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6
Flicker-free	yes

TEMPERATURE TECHNICAL DATA

Ambient temperature during operating	- 20 ... + 40
Rated life time L80/B10 at 25 °C	50000

PACKAGING INFORMATION

BL Loop

State of origin

BL Loop profile luminaire D900mm 3600lm 40W 110D 840 black DALI

Net width [mm]

Article no.: 704008

Net height [mm]

Net length [mm]

CN

900

60

900



BETTER LIGHT

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at