


BL Loop

BL Loop profile luminaire D900mm 3600lm 40W 110D 840 black DALI

Article no.: 704008

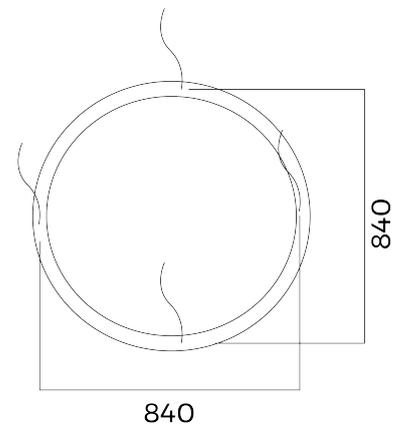

Colour housing



Type of fastening



Rated life time L80/B10 at
25 °C



Dimming DALI

TENDER TEXT

Round LED profile luminaire including suspension, black aluminium housing, 40W, 3,600lm, 4,000K, DALI, CRI>80, 110° direct beam angle, incl. DALI power supply unit, profile size W 60 x H60mm, dimensions: D900 x H60mm Item 704008 LED ring luminaire made of Aluminium black with power supply - Yes, rated voltage AC; cover made of Plastic Opal; dimmable DALI Yes or ON/OFF; protection class IP20; flicker-free Yes; easy to install Yes; lifespan of 50000, Luminous flux 3600, Colour temperature 4000, Colour reproduction >80, Beam angle 110, Ambient temperature -20 ... +40 diameter 900 x height 60

TOP-FEATURES

//__ LED ring light suitable for a wide range of applications for general lighting
//__ Available as switchable on/off or dimmable DALI version
//__ Easy installation



PACKAGING INFORMATION

BL Loop

State of origin	CN
BL Loop profile luminaire D900mm 3600lm 40W 110D 840 black DALI	
Net width [mm]	900
Article no.: 704008	
Net height [mm]	60
Net length [mm]	900



BETTER LIGHT

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at