


# BL Moisture-proof luminaire Pure+

BL MPR Pure+ moisture-proof luminaire 1221mm 5600lm 40W 120D 840 230V

Article no.: 752021

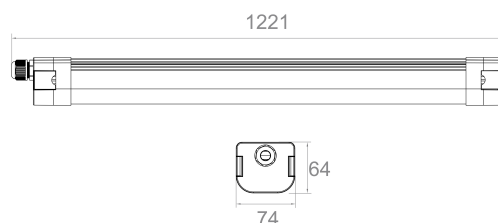

IK08

Impact strength

IP65

Degree of protection (IP)

yes

Control gear included

yes

Fireproof

## TENDER TEXT

LED damp-proof light, plastic housing with aluminum interior, IP65, IK08, 4000K, luminous flux 5,600 lm, 140 lm/W, CRI>80, incl. converter, fire-protected, through-wiring possible, 1,221x74x64mm, BL Moisture-proof luminaire Pure+ Article 752021 LED moisture-proof luminaire made of Kunststoff, switchable luminaire with LED converter - yes mounted in housing, mounting type Anbau - ceiling mounting with enclosed Mounting brackets possible, geeignet für Durchgangsverdrahtung, switch nein, fireproof yes, protection class IP65, impact resistance IK08, Lifetime of 50000, Power 40, Colour rendering >80, colour temperature 4000, beam angle 120, ambient temperature -20...+40, dimensions (L/W/H): 1221 x 74 x 64

## TOP-FEATURES

//\_\_ Very robust thanks to protection class IP65

//\_\_ Fireproof yes

//\_\_ Impact resistance IK08



# BL Moisture-proof luminaire Pure+

**BL MPR Pure+ moisture-proof luminaire 1221mm 5600lm 40W 120D 840 230V**

Article no.: 752021



## MECHANICAL DATA

Material	Kunststoff
Colour housing	White
Width	74
Length	1221
Height/depth	64
Mounting method	Anbau
With movement sensor	nein
With switch	nein
Lamp type	LED nicht austauschbar
Type of fastening	Mounting brackets
Material of the cover	Plastic opal
Impact strength	IK08
Degree of protection (IP)	IP65
With lamp	yes
Control gear included	yes
Fireproof	yes

## ELECTRICAL DATA

Nominal voltage	220 - 240
Operating frequency	50 / 60
Overall efficiency	140
Max. system power	40
Power factor	0.95
Type of wiring	geeignet für Durchgangsverdrahtung

## LIGHT TECHNICAL DATA

Beam angle	120
Colour rendering index CRI	>80
Light exit	direkt
Light distribution	symmetrical
Rated luminous flux according to IEC 62722-2-1	5600
Colour temperature	4000
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM6

## TEMPERATURE TECHNICAL DATA

Impact strength	IK08
Ambient temperature during operating	- 20... + 40
Rated life time L70/B10 at 25 °C	50000

PACKAGING INFORMATION

BL Moisture-proof luminaire Pure+



State of origin	CN	
BL MPR Pure+ moisture-proof luminaire 1221mm 5600lm 40W 120D 840 230V		
Customs tariff number	94054099	
Article no.: 752021		
Net weight [g]	9000	BETTER LIGHT
Gross weight [g]	10500	
Gross width [mm]	80	
Gross height [mm]	70	
Gross length [mm]	1280	
Net width [mm]	74	
Net height [mm]	64	
Net length [mm]	1221	

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)