


# BL Panel Comfort+ EOL

**BL Panel Comfort + 597mm 4000lm 33W 90D 940 white 900mA**  
Article no.: 710036




Colour housing

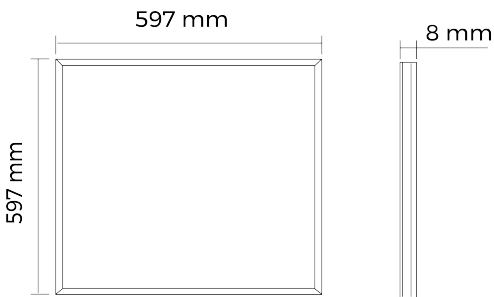

Mounting method



Colour of light



Unified Glare Ratio (UGR)

## TENDER TEXT

LED panel, 4,000 lumens, 33W, 90° direct beam, CRI >90, 4,000 Kelvin, IP20, protection class III, dimmable, UGR BL Panel Comfort+ EOL Article 710036 LED panel for installation as Surface / Installation / Suspension - made of high-quality, White coated frames made of Metall . Microprismatic layer for modular ceilings with concealed or visible support system. Very flat and compact design with a total height of 8 . Best light quality with precise glare control 90 ; light color White , color temperature 4000 ; beam angle 90 , mounting set for Surface / Installation / Suspension must be ordered separately. Dimensions (L x W x H): 597 x 597 x 8

## TOP-FEATURES

- //\_\_ LED panel light with microprismatic layer for modular ceilings with concealed or visible support system
- //\_\_ Best light quality with precise glare control and homogeneous light distribution over the entire light emission surface
- //\_\_ Glare limitation (UGR) <19



# BL Panel Comfort+ EOL

**BL Panel Comfort + 597mm 4000lm 33W 90D 940 white 900mA**

Article no.: 710036



## MECHANICAL DATA

Material housing	Metall
Colour housing	White
Width	597
Length	597
Height/depth	8
Mounting method	Surface / Installation / Suspension
Lamp type	LED nicht austauschbar
Material of the cover	Plastic opal
Degree of protection (IP)	IP20
With lamp	yes
Control gear included	nein
Unified Glare Ratio (UGR)	<19

## ELECTRICAL DATA

Protection class	III
Voltage type	DC
Nominal voltage	35 - 41
Overall efficiency	121
Max. system power	33
Dimming depending on control gear	yes

## LIGHT TECHNICAL DATA


Beam angle	90
Colour rendering index CRI	>90
Light exit	direkt
Light distribution	symmetrical
Rated luminous flux according to IEC 62722-2-1	4000
Colour temperature	4000
Colour of light	White
Colour consistency (McAdam ellipse)	SDCM4

## TEMPERATURE TECHNICAL DATA

Ambient temperature during operating	- 20 ... + 40
Rated life time L80/B10 at 25 °C	50000

## PACKAGING INFORMATION

State of origin	CN
Customs tariff number	94054239
Net weight [g]	2700

Gross weight [g]	3200	 <b>BETTER LIGHT</b>
Gross width [mm]	608	
Gross height [mm]	24	
<b>BL Panel Comfort + 597mm 4000lm 33W 90D 940 white 900mA</b>		
Gross length [mm]	621	
Article no.: 7110036		
Net width [mm]	597	
Net height [mm]	8	
Net length [mm]	597	

## NECESSARY ACCESSORIES

Article	Article no.
	<b>719098</b>

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)