


BL Panel Protected

BL Panel Protected 620mm 3750lm 32W 60D 840 white IP54

Article no.: 713005

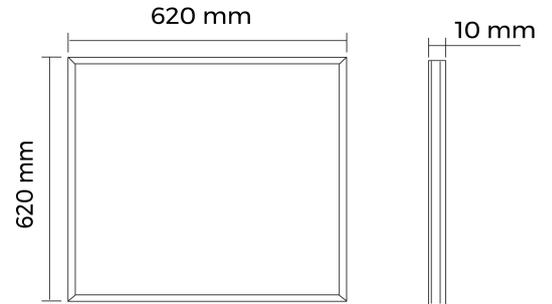

Beam angle



Degree of protection (IP)



Rated luminous flux
according to IEC
62722-2-1

TENDER TEXT

LED panel, 3,750 lumen, 32W, 60° direct beam, CRI >80, 4,000 Kelvin, IP54, protection class II, non-dimmable, UGR BL Panel Protected Article 713005 LED panel for installation as Surface / Installation / Suspension - made of high-quality, White coated frames made of Aluminium . Microprismatic layer for modular ceilings with concealed or visible support system. Very flat and compact design with a total height of 10 . Homogeneous light distribution across the entire light emission surface, service life of 50000 , luminous flux 3750 ; Current max. , color rendering >80 ; light color White , color temperature 4000 ; UGR

TOP-FEATURES

- //__ Very flat and compact design with a total height of 10
- //__ Best light quality with precise glare control thanks to UGR <19
- //__ Suitable for particularly demanding environments, thanks to IP54 protection class



BL Panel Protected

BL Panel Protected 620mm 3750lm 32W 60D 840 white IP54

Article no.: 713005



PACKAGING INFORMATION

State of origin	CN
Net weight [g]	2700
Gross weight [g]	3200
Net width [mm]	620
Net height [mm]	10
Net length [mm]	620

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at