


BL Panel Pure

BL Panel Pure 1197mm 4500lm 34W 90D 840 white 1000mA

Article no.: 712026

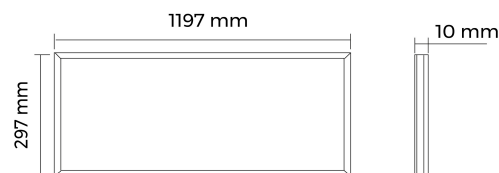

Beam angle



Degree of protection (IP)



Colour temperature



Rated luminous flux
according to IEC
62722-2-1

TENDER TEXT

LED panel, 4,500 lumen, 34W, 90° direct beam, CRI >80, 4,000 Kelvin, IP20, protection class III, dimmable, UGR BL Panel Pure Article 712026 LED panel for installation as Surface / Installation / Suspension - made of high-quality, White coated frames made of Aluminium . Microprismatic layer for modular ceilings with concealed or visible support system. Very flat and compact design with a total height of 10 . Best light quality with precise glare control 80 ; light color White , color temperature 4000 ; beam angle 90 , mounting set for Surface / Installation / Suspension must be ordered separately. Dimensions (L x W x H): 1197 x 297 x 10

TOP-FEATURES

//__ This bright and efficient luminaire is the perfect lighting solution for all applications with high lighting requirements

//__ Thanks to the glare limitation <19 the panel is particularly suitable for the workplace area

//__ Panel with microprismatic cover



BL Panel Pure

BL Panel Pure 1197mm 4500lm 34W 90D 840 white 1000mA

Article no.: 712026



MECHANICAL DATA

Material housing	Aluminium
Colour housing	White
Width	297
Length	1197
Height/depth	10
Mounting method	Surface / Installation / Suspension
With movement sensor	nein
Lamp type	LED nicht austauschbar
Material of the cover	Plastic structured
Degree of protection (IP)	IP20
Control gear included	nein
Unified Glare Ratio (UGR)	<19

ELECTRICAL DATA

Protection class	III
Voltage type	DC
Nominal voltage	30,1 - 36,8
Overall efficiency	132
Max. system power	34

LIGHT TECHNICAL DATA


Beam angle	90
Colour rendering index CRI	>80
Light exit	direkt
Rated luminous flux according to IEC 62722-2-1	4500
Colour temperature	4000
Colour of light	White
Energy efficiency class of the built-in lamp	D
Colour consistency (McAdam ellipse)	SDCM4

TEMPERATURE TECHNICAL DATA

Rated life time L80/B50 at 25 °C	50000
----------------------------------	-------

PACKAGING INFORMATION

State of origin	CN
Customs tariff number	94054239
Net weight [g]	2800
Gross weight [g]	6000
Gross width [mm]	345

Gross height [mm]	62	 BETTER LIGHT
BL Panel Pure		
Gross length [mm]	1245	
Net width [mm]	297	
Net height [mm]	10	
Article no.: 712026		
Net length [mm]	1197	

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at