


BL Panel Pure

BL Panel Pure 620mm 4500lm 34W 90D 840 white 1000mA LA
Article no.: 712025



Beam angle

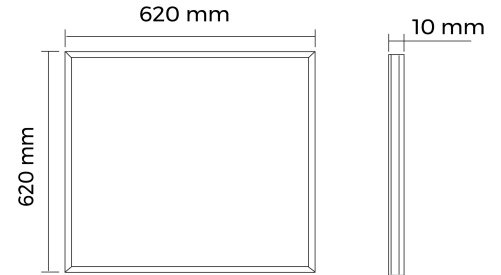

Degree of protection (IP)



Colour temperature



Rated luminous flux
according to IEC
62722-2-1

TENDER TEXT

LED panel, 4,500 lumen, 34W, 90° direct beam, CRI >80, 4,000 Kelvin, IP20, protection class III, dimmable, UGR BL Panel Pure Article 712025 LED panel for installation as Surface / Installation / Suspension - made of high-quality, White coated frames made of Aluminium . Microprismatic layer for modular ceilings with concealed or visible support system. Very flat and compact design with a total height of 10 . Best light quality with precise glare control 80 ; light color White , color temperature 4000 ; beam angle 90 , mounting set for Surface / Installation / Suspension must be ordered separately. Dimensions (L x W x H): 620 x 620 x 10

TOP-FEATURES

//__ This bright and efficient luminaire is the perfect lighting solution for all applications with high lighting requirements

//__ Thanks to the glare limitation <19 the panel is particularly suitable for the workplace area

//__ Panel with microprismatic cover



BL Panel Pure

BL Panel Pure 620mm 4500lm 34W 90D 840 white 1000mA LA

Article no.: 712025



PACKAGING INFORMATION

State of origin	CN
Customs tariff number	94054239
Net weight [g]	2480
Gross weight [g]	5200
Gross width [mm]	655
Gross height [mm]	62
Gross length [mm]	665
Net width [mm]	620
Net height [mm]	10
Net length [mm]	620

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at