



BL Panel Round

BL Panel Round 400mm 2900lm 30W 110D 840 white 800mA

Article no.: 714001

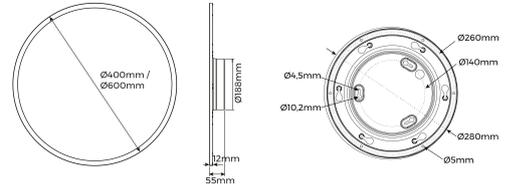

Beam angle



Degree of protection (IP)



Colour temperature



Rated luminous flux
according to IEC
62722-2-1

TENDER TEXT

LED panel round, 2,900 lumen, 33W, 110° direct beam, CRI >80, 4,000 Kelvin, IP20, protection class III, non-dimmable, UGR BL Panel Round Article 714001 LED panel for installation as Surface / Installation / Suspension - made of high-quality, White coated frames made of Aluminium . Microprismatic layer for modular ceilings with concealed or visible support system. Very flat and compact design with a total height of 12 . Homogeneous light distribution across the entire light emission surface, service life of 50000 , luminous flux 2900 ; Current max. , color rendering >80 ; light color White , color temperature 4000 K; UGR

TOP-FEATURES

- //_ Frame material: Aluminium
- //_ The lamp body is attached using bayonet locking technology
- //_ Various types of mounting Surface / Installation / Suspension possible
- //_ Flicker-free



BL Panel Round

BL Panel Round 400mm 2900lm 30W 110D 840 white 800mA

Article no.: 714001



MECHANICAL DATA

Material housing	Aluminium
Colour housing	White
Width	12
Length	400
Height/depth	12
Installation diameter	188
Outer diameter	400
Mounting method	Surface / Installation / Suspension
With movement sensor	nein
With light sensor	nein
Lamp type	LED nicht austauschbar
Material of the cover	Plastic opal
Degree of protection (IP)	IP20
With lamp	yes
Control gear included	nein
Installation height/depth	43
Unified Glare Ratio (UGR)	<25

ELECTRICAL DATA

Protection class	III
Voltage type	DC
Nominal voltage	35 - 38
Overall efficiency	97
Max. system power	30
Dimming depending on control gear	yes

LIGHT TECHNICAL DATA

Beam angle	110
Colour rendering index CRI	>80
Light exit	direkt
Light distribution	symmetrical
Rated luminous flux according to IEC 62722-2-1	2900
Colour temperature [K]	4000
Colour of light	White
Energy efficiency class of the built-in lamp	F
Colour consistency (McAdam ellipse)	SDCM4

TEMPERATURE TECHNICAL DATA

Ambient temperature during operating	- 20 ... + 40
--------------------------------------	---------------

Rated life time L70/B10 at 25 °C

50000

BL Panel Round



BETTER LIGHT

BL Panel Round 400mm 2900lm 30W N10D 840 white 800mA

Article no.: 714001

State of origin

CN

Net weight [g]

2740

Gross weight [g]

3080

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at