


BL Panel Round

BL Panel Round 600mm 3350lm 36W 110D 840 white 1050mA

Article no.: 714012

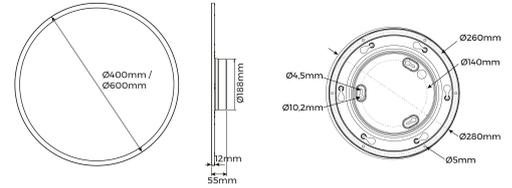

Beam angle



Degree of protection (IP)



Colour temperature



Rated luminous flux
according to IEC
62722-2-1

TENDER TEXT

LED panel round, 3,350 lumens, 110° direct beam, CRI >80, 4,000 Kelvin, IP20, protection class III, not dimmable, white aluminum housing, without power supply, dimensions: D 600mm x 12mm BL Panel Round Article 714012 LED panel for installation as Surface / Installation / Suspension - made of high-quality, White coated frames made of Aluminium . Microprismatic layer for modular ceilings with concealed or visible support system. Very flat and compact design with a total height of 12 . Homogeneous light distribution across the entire light emission surface, service life of 50000 , luminous flux 3350 ; Current max. , color rendering >80 ; light color White , color temperature 4000 ; UGR

TOP-FEATURES

//_ Frame material: Aluminium

//_ The lamp body is attached using bayonet locking technology

//_ Various types of mounting Surface / Installation / Suspension possible

//_ Flicker-free



BL Panel Round

BL Panel Round 600mm 3350lm 36W 110D 840 white 1050mA

Article no.: 714012



PACKAGING INFORMATION

State of origin	CN
Net weight [g]	4740
Gross weight [g]	5700
Net width [mm]	600
Net height [mm]	12
Net length [mm]	600

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at