


Downlight Pure

LED DRIVER 220-240V CC 350mA 9-45VDC DALI

Article no.: 729179

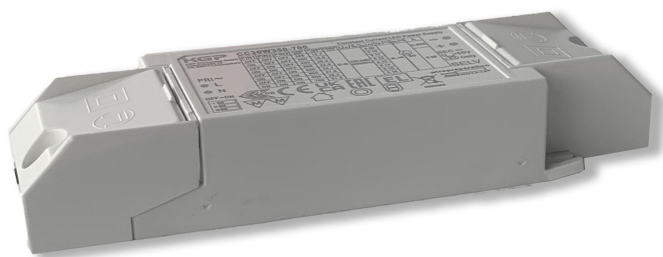


TENDER TEXT

incl. connection cable for FDL180



MECHANICAL DATA

Housing	Kunststoffgehäuse	 BETTER LIGHT
Downlight Pure		
Width	44	
Length	137,5	
LED DRIVER 220-240V CC 350mA 9-45VDC DALI		
Height	23	
Article no.: 729179		
Colour	White	
Model	dynamisch	
Control signal	DALI / Switch	
Suitable for outdoor use	nein	
Degree of protection (IP)	IP20	
Core cross section	0,5 - 1,5	

ELECTRICAL DATA

Protection class	II
Voltage type	AC / DC
Control signal	DALI / Switch
Input voltage range	198 - 264
Output voltage range	9 - 45
Output current range	350
Standby power consumption (solstandby)	0.45
Suitable for constant current	yes
Suitable for constant voltage	nein
Dimming DALI	yes

CONNECTION

Core cross section	0,5 - 1,5
--------------------	-----------

TEMPERATURE TECHNICAL DATA

Operation temperature at Tc	0 ... + 80
Ambient temperature during operating	- 20 ... + 45

PACKAGING INFORMATION

State of origin	CN
Customs tariff number	85044083

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at