


Panel Backlit

LED DRIVER 220-240V CC 900mA 24-42VDC DALI SW BOKE

Article no.: 719262

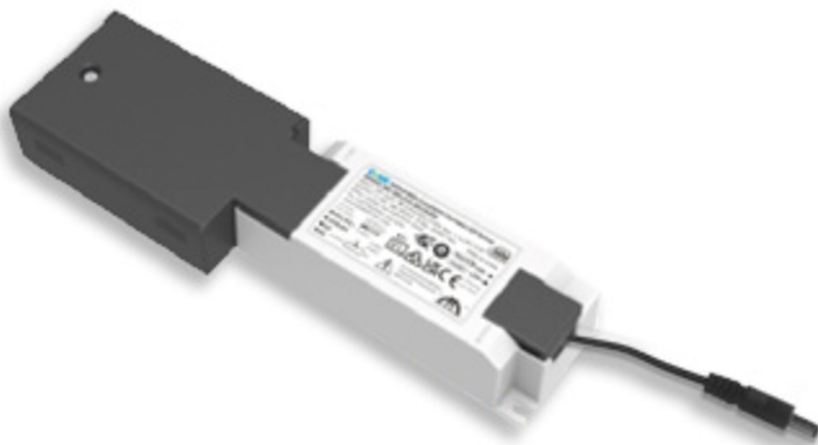

Control signal



Degree of protection (IP)



Output current range



Dimming DALI

TENDER TEXT

Includes connection cable for Panel Backlit + primary through-wiring box BILTON LEDON Technology Panel Backlit Article 719262
The power supply can be used for a output voltage range of 24-42 . Constant current 600-1050 . The supply voltage of the power supply is 180 - 264 and has a IP20 protection type and protection class II . Control signal DALI/Switch . Dimensions (L x W x H): 228.2 x 60.9 x 30



Panel Backlit

LED DRIVER 220-240V CC 900mA 24-42VDC DALI SW BOKE

Article no.: 719262



PACKAGING INFORMATION

State of origin	CN
Customs tariff number	85044083
Net weight [g]	132
Gross weight [g]	8980
Gross width [mm]	265
Gross height [mm]	380
Gross length [mm]	425
Net width [mm]	60.9
Net height [mm]	30
Net length [mm]	228.2

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at