
BL DIM Basic DALI

BL Dimmer BASIC 12-24VDC 240W for LED strip IP20 DALI SWITCH

Article no.: 101639



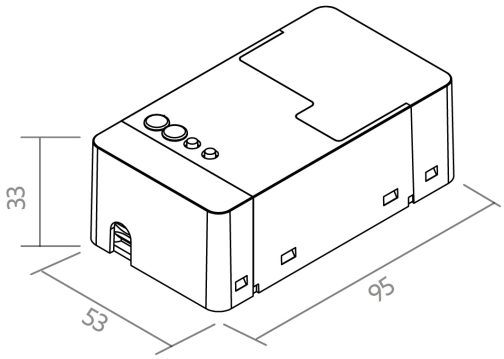

12 - 24	240	DALI / Switc	10000
Imput voltage range	Output power range	Control signal	Output current range

TENDER TEXT

1-4 channel LED dimmer for constant voltage 12-24VDC. Maximum total output 240W at 24VDC (max. 10A). Input voltage 12-24VDC. Control signal DALI or Switch Dimm. PWM frequency 600Hz. Protection class IP20. Protection class III. dimensions LxWxH = 95x53x33mm LED dimmer BILTON LEDON Technology BL DIM Basic DALI DALI/Switch Article 101639 The BL DIM Basic DALI series is a 1- to 4 channel LED dimmer for modules in constant current operation. The total load of max. 10000 can be freely distributed to these 4 channels. The controller is operated with DALI/Switch and 12 - 24 and has an output voltage of 12-24 DC. The power dissipation in stand-by is 0.5 . The dimming frequency of the PWM signal is 600 . Protection degree IP20 and protection class III . Dimension (L x W x H): 95 x 53 x 33

IP20 | DALI / Switch | III | RoHS COMPLIANT 2002/95/EC | CE

© BILTON LEDON Technology | www.better-light.at
Gewerbepark Harham 2, 5760 Saalfelden | Austria | Phone: +43 6582 71164 | Mail: office@bltechnology.at
Version: 20261119 | Errors and printing errors are reserved.

BL DIM Basic DALI

BL Dimmer BASIC 12-24VDC 240W for LED strip IP20 DALI SWITCH
Article no.: 101639

PACKAGING INFORMATION

State of origin	SI
Customs tariff number	85423190
Net weight [g]	93
Gross weight [g]	142
Gross width [mm]	58
Gross height [mm]	50
Gross length [mm]	252
Net width [mm]	53
Net height [mm]	33
Net length [mm]	95

NECESSARY ACCESSORIES

Article	Article no.
DALI Controller	170217
DALI Power Supply	170229

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at