
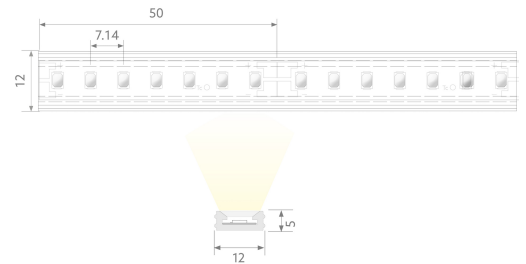


# BLAIR SLIM 600 IP67

BL AIR Slim LED tube 600lm/m 24VDC 8.8W/m IP67 927 5m satinised

Article no.: 101880

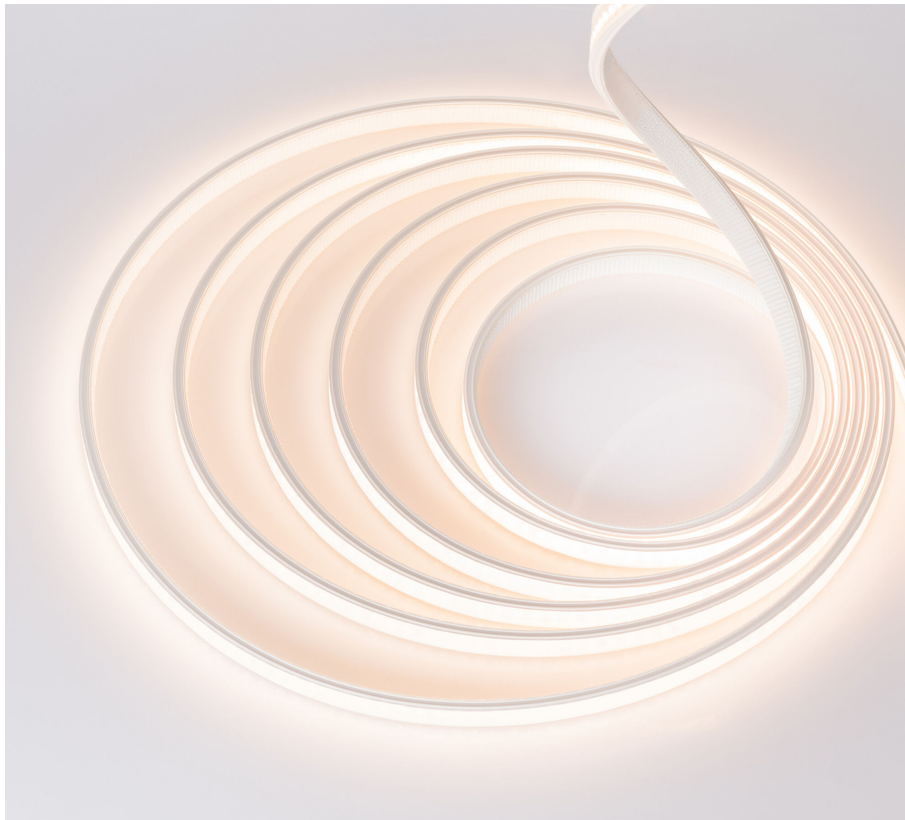

Max. length



Degree of protection (IP)



Luminous flux per meter

## TENDER TEXT

AIR Slim LED light tube, LED strip in satinised silicone sheath, 600 lm/m, wave-shaped bend to light emission surface, cable connection on one side, cable outlet at bottom, 24VDC 8.8W/m IP67 CRI>90 2700K WHITE, W 12mm x H 5mm x L 5000mm LED module BLAIR SLIM 600 IP67 Article 101880 Linear LED light strip on a flexible circuit board. Installation via Self-adhesive tape on the back and appropriate mounting accessories in conjunction with Plug-&-Play connection system. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +45 at a service life of 50000 . The BLAIR SLIM 600 IP67 LED-strip has a luminous flux of 600 at 8.8 , resulting in an efficiency of 68 . At a nominal voltage of 24 DC on the connection, a maximum module length of 5000 can be achieved. In terms of lighting, the module has a colour temperature of 2700 and a beam angle of 120 . All this with a colour rendering index of >90 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50 , resulting in a LED distance of 7.14 . Degree of protection IP67 Smallest possible bending radius 200 Dimension (L x W x H): 5020 x 12 x 5

## TOP-FEATURES

- //\_\_ IP67 protection in highly flexible silicone sheath
- //\_\_ Self-adhesive tape on the back for easy installation
- //\_\_ Extremely thin construction (width x height) 12 x 5 for subtle lines of light
- //\_\_ With lateral clamping knobs ideal for groove mounting in milled areas

## PACKAGING INFORMATION

|                       |          |
|-----------------------|----------|
| State of origin       | AT       |
| Customs tariff number | 94054039 |
| Net weight [g]        | 265      |
| Gross weight [g]      | 385      |
| Gross width [mm]      | 330      |
| Gross height [mm]     | 27       |
| Gross length [mm]     | 330      |
| Net width [mm]        | 12       |
| Net height [mm]       | 5        |
| Net length [mm]       | 5020     |

\* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of +/- 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.better-light.at](http://www.better-light.at)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.better-light.at](http://www.better-light.at)