


BL Drive DIM KNX

BL Dimmer SXT 230VAC 100W for LED strip IP20 KNX

Article no.: 101651

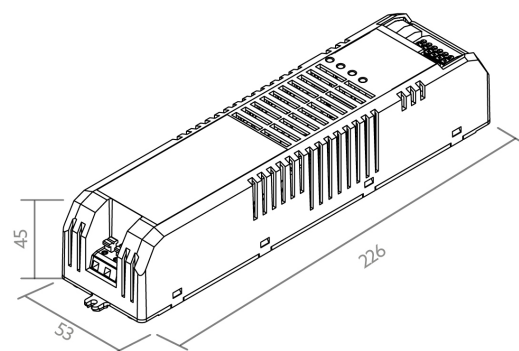

220 - 240

Input voltage range

100

Output power range

KNX

Control signal

4000

Output current range

TENDER TEXT

1-4 channel LED dimmer for constant voltage 24VDC. Maximum total output 100W at 24VDC (max. 4A). Input voltage 230VAC/50Hz. KNX control signal. PWM frequency 600Hz. Protection class IP20. Protection class III. dimensions LxWxH = 226x53x45mm LED dimmer BILTON LEDON Technology BL Drive DIM KNX KNX Article 101651 The BL Drive DIM KNX series is a 1- to 4 channel LED dimmer for modules in constant current operation. The total load of max. 4000 can be freely distributed to these 4 channels. The controller is operated with KNX and 220 - 240 and has an output voltage of 24 DC. The power dissipation in stand-by is 0.5 . The dimming frequency of the PWM signal is 600 . Protection degree IP20 and protection class III . Dimension (L x W x H): 226 x 53 x 45



BL Dimmer SXT 230VAC 100W for LED strip IP20 KNX

Article no.: 101651



PACKAGING INFORMATION

State of origin	SI
Customs tariff number	85423190
Net weight [g]	352
Gross weight [g]	393
Gross width [mm]	58
Gross height [mm]	50
Gross length [mm]	252
Net width [mm]	53
Net height [mm]	45
Net length [mm]	226

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.better-light.at

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.better-light.at